EX-6452

PCI FireWire 1394A

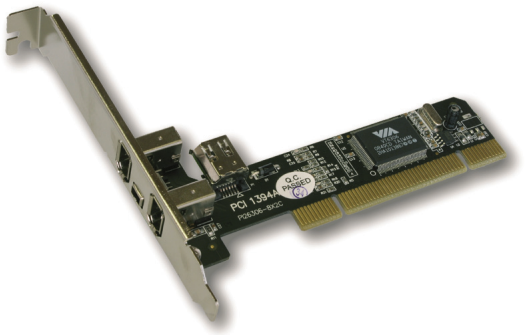

Anwendung / Application

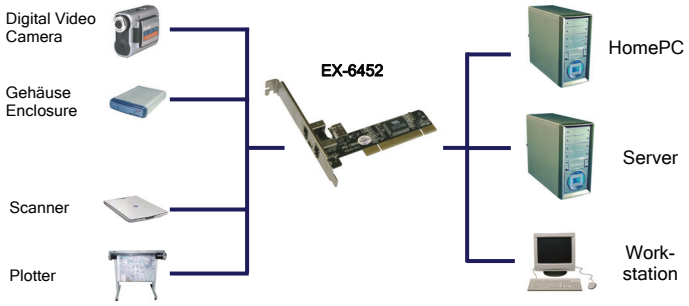

FireWire IEEE 1394a PCI Karte mit 3+1 Port (VIA Chip-Set)

Beschreibung

Die EX-6452 PCI FireWire IEEE1394a (FireWire400) Karte stellt drei externe und einen internen FireWire 1394a Port zur Verfügung. Sie ist entwickelt worden um vier weitere FireWire 1394a Highspeeds Ports für PCs, kleine Workstations oder Server über den PCI Bus zu erweitern. An die EX-6452 können FireWire 400 1394a Geräte zum Beispiel Plotter, Scanner usw. angeschlossen werden.

Merkmale

- Unterstützt bis zu 63 Geräte
- Kompatibel zu IEEE 1394-1995, 1394a (rev. 1.1) und OHCI Schnittstelle Spezifikation 1.0
- „Hot swapping“ Geräte können ohne den Computer auszuschalten eingesteckt und ausgezogen werden
- Kann auch zusätzlich zu den FireWire Ports vom Motherboard installiert werden
- Der interne Anschluss wird mit dem ersten externen (P2) Anschluss geteilt

Spezifikationen

- **Chip-Set:** VIA VT6306
- **Datentransfer-Rate:** Bis 400Mbps
- **Anschlüsse**: 2 x 6 Pin FireWire 1394a Buchse Extern
1 x 4 Pin FireWire 1394a Buchse Extern
1 x 6 Pin FireWire 1394a Buchse Intern
- **Hardwaresysteme:** PCI- und PCI-X Bus
- **Treiber:** Vom OS zur Verfügung gestellt
- **Betriebssysteme:** Win 2000/XP/Vista/Server(2000, 2003&2008)/Win7
- **Betriebstemperatur :** 0^0 bis 55^0 Celsius
- **Lagertemperatur:** -40^0 bis 75^0 Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Abmessung:** 50 x 120 mm
- **Gewicht**: 200g
- **Lieferumfang**: EX-6452, Handbuch

FireWire IEEE 1394a PCI card with 3+1 ports (VIA Chip-Set)

Description

The EX-6452 PCI IEEE1394a (FireWire400) card provides a reliable solution for PC computers to connect to IEEE1394a (FireWire400) peripherals. The EX-6452 supports up to 63 IEEE 1394a FireWire400 devices, including digital video camcorders and high-resolution colour printers. The EX-6452 provides a true high performance I/O solution for users are demanding the IEEE1394a consumer and professional devices.

Features

- Support up to 63 device
- Compliant IEEE 1394-1995, 1394a (rev.1.1) and OHCI Interface Specification 1.0
- “Hot swapping” to connect/disconnect devices without turning off the computer
- Can install to existing FireWire ports from the Motherboard
- One internal IEEE 1394 port (Sharing with the first external IEEE 1394 port P2)
- Supports various brands of DV camcorder including Sony, Panasonic, JVC Sharp and more

Specifications

- **Chip-Set:** VIA VT6306
- **Data transfer rate:** Up to 400Mbps
- **Connectors**: 2 x external 6 pin FireWire1394a female
1 x external 4 pin FireWire 1394a female
1 x Internal 6 pin FireWire 1394a female
- **Hardware system:** PCI- and PCI-X Bus
- **Driver:** Provided by operating system
- **Operating systems:** Win 2000/XP/Vista/Server(2000, 2003&2008)/Win7
- **Operating Temperature :** 32^0 up to 131^0 Fahrenheit
- **Storage Temperature:** -40^0 up to 167^0 Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Size:** 65 x 67 mm
- **Weight**: 200g
- **Packaging contents**: EX-6452, Manual

System / OS

Geprüft / Approved

Verpackung / Packaging